

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 7A
2. Withstanding voltage : AC1300V/1Min.
3. Wire range : 22~18AWG(SOL)

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	630V	320V	250V
Rate current(A)	6A		

2. Wire range : 0.5~1.0mm²(SOL)

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 2.1mm, Poles : 02P
3. Stripping length : 5~6mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:






Pitch range in mm	Nominal dimension range in mm						- / □		
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150			
TO 6	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6. RoHS Compliance

DG220B - 2.1 - 02P - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

(RoHS)
 00A-(Standard)

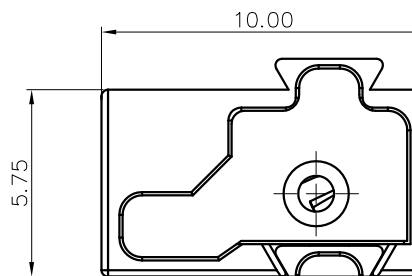

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	<p>THIRD ANGLE PROJECTION</p>		<p>DO NOT SCALE DRAWING</p>		<p>SCALE: 1:1</p>
<p>NINGBO DEGSON ELECTRICAL CO., LTD</p>		<p>NAME: DG220B-2.1-02P-1Y-00A(H)</p>		<p>REV: /</p>	
<p>TITLE: CUSTOMER DRAWING</p>		<p>DRAWING NO.: /</p>		<p>DO: 1/1</p>	
<p>SHEET: /</p>		<p>MM (INCH)</p>		<p>SCALE: 1:1</p>	